

इंटरनेट

मानक

Disclosure to Promote the Right To Information

Whereas the Parliament of India has set out to provide a practical regime of right to information for citizens to secure access to information under the control of public authorities, in order to promote transparency and accountability in the working of every public authority, and whereas the attached publication of the Bureau of Indian Standards is of particular interest to the public, particularly disadvantaged communities and those engaged in the pursuit of education and knowledge, the attached public safety standard is made available to promote the timely dissemination of this information in an accurate manner to the public.

“जानने का अधिकार, जीने का अधिकार”

Mazdoor Kisan Shakti Sangathan

“The Right to Information, The Right to Live”

“पुराने को छोड़ नये के तरफ”

Jawaharlal Nehru

“Step Out From the Old to the New”

IS 14700-4-3 (2008): Electromagnetic Compatibility (EMC),
Part 4: Testing and Measurement Techniques, Section 3
:Radiated, Radio frequency, electromagnetic field immunity
test [LITD 9: Electromagnetic Compatibility]



“ज्ञान से एक नये भारत का निर्माण”

Satyanarayan Gangaram Pitroda

“Invent a New India Using Knowledge”



“ज्ञान एक ऐसा खजाना है जो कभी चुराया नहीं जा सकता है”

Bhartrhari—Nitiśatakam

“Knowledge is such a treasure which cannot be stolen”

BLANK PAGE



भारतीय मानक
विद्युत चुम्बकीय संगतता (ई एम सी)
भाग 4 परीक्षण और मापन तकनीकें
अनुभाग 3 विकिरण, रेडियो आवृत्ति विद्युत-चुम्बकीय प्रतिरक्षा परीक्षण
(पहला पुनरीक्षण)

Indian Standard
ELECTROMAGNETIC COMPATIBILITY (EMC)

PART 4 TESTING AND MEASUREMENT TECHNIQUES

Section 3 Radiated, Radio Frequency, Electromagnetic Field Immunity Test
(*First Revision*)

ICS 33.100.20

© BIS 2008

BUREAU OF INDIAN STANDARDS
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG
NEW DELHI 110002

September 2008

Price Group 14

NATIONAL FOREWORD

This Indian Standard (Part 4/Sec 3) (First Revision) which is identical with IEC 61000-4-3 : 2006 'Electromagnetic compatibility (EMC) — Part 4-3: Testing and measurement techniques — Radiated, radio-frequency, electromagnetic field immunity test' issued by the International Electrotechnical Commission (IEC) was adopted by the Bureau of Indian Standards on the recommendation of the Electromagnetic Compatibility Sectional Committee and approval of the Electronics and Information Technology Division Council.

This standard was originally published in 2005 and was identical to IEC 61000-4-3 : 2002. This standard is being revised to align it with the latest IEC publication IEC 61000-4-3 : 2006.

The text of IEC Standard has been approved as suitable for publication as an Indian Standard without deviations. Certain conventions are, however, not identical to those used in Indian Standards. Attention is particularly drawn to the following:

- a) Wherever the words 'International Standard' appear referring to this standard, they should be read as 'Indian Standard'.
- b) Comma (,) has been used as a decimal marker, while in Indian Standards, the current practice is to use a point (.) as the decimal marker.

In this adopted standard, reference appears to the following International Standard for which Indian Standard also exists. The corresponding Indian Standard which is to be substituted in its respective place is listed below along with its degree of equivalence for the edition indicated:

<i>International Standard</i>	<i>Corresponding Indian Standard</i>	<i>Degree of Equivalence</i>
IEC 60050-161 : 1990 International Electrotechnical Vocabulary (IEV) — Chapter 161: Electromagnetic compatibility	IS 1885 (Part 85) : 2003 Electrotechnical vocabulary: Part 85 Electromagnetic compatibility	Identical

The technical committee responsible for the preparation of this standard has reviewed the provisions of following International Standard referred in this adopted standard and has decided that it is acceptable for use in conjunction with this standard:

<i>International Standard</i>	<i>Title</i>
IEC 61000-4-6 : 2006	Electromagnetic compatibility (EMC) — Part 4-6: Testing and measurement techniques — Immunity to conducted disturbances induced by radio-frequency fields

Only the English language text of the International Standard has been retained while adopting it as an Indian Standard, and as such the page numbers given here are not the same as in the IEC Publication.

Indian Standard
ELECTROMAGNETIC COMPATIBILITY (EMC)

PART 4 TESTING AND MEASUREMENT TECHNIQUES

Section 3 Radiated, Radio Frequency, Electromagnetic Field Immunity Test
(First Revision)

1 Scope and object

This part of IEC 61000 is applicable to the immunity requirements of electrical and electronic equipment to radiated electromagnetic energy. It establishes test levels and the required test procedures.

The object of this standard is to establish a common reference for evaluating the immunity of electrical and electronic equipment when subjected to radiated, radio-frequency electromagnetic fields. The test method documented in this part of IEC 61000 describes a consistent method to assess the immunity of an equipment or system against a defined phenomenon.

NOTE 1 As described in IEC Guide 107, this is a basic EMC publication for use by product committees of the IEC. As also stated in Guide 107, the IEC product committees are responsible for determining whether this immunity test standard should be applied or not, and if applied, they are responsible for determining the appropriate test levels and performance criteria. TC 77 and its sub-committees are prepared to co-operate with product committees in the evaluation of the value of particular immunity tests for their products.

This part deals with immunity tests related to the protection against RF electromagnetic fields from any source.

Particular considerations are devoted to the protection against radio-frequency emissions from digital radiotelephones and other RF emitting devices.

NOTE 2 Test methods are defined in this part for evaluating the effect that electromagnetic radiation has on the equipment concerned. The simulation and measurement of electromagnetic radiation is not adequately exact for quantitative determination of effects. The test methods defined are structured for the primary objective of establishing adequate repeatability of results at various test facilities for qualitative analysis of effects.

This standard is an independent test method. Other test methods may not be used as substitutes for claiming compliance with this standard.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050(161), *International Electrotechnical Vocabulary (IEV) – Chapter 161. Electromagnetic compatibility*

IEC 61000-4-6, *Electromagnetic compatibility (EMC) – Part 4-6: Testing and measurement techniques – Immunity to conducted disturbances, induced by radio-frequency fields*

3 Terms and definitions

For the purposes of this part of IEC 61000, the following definitions, together with those in IEC 60050(161) apply.

3.1

amplitude modulation

process by which the amplitude of a carrier wave is varied following a specified law

3.2

anechoic chamber

shielded enclosure which is lined with radio-frequency absorbers to reduce reflections from the internal surfaces

3.2.1

fully anechoic chamber

shielded enclosure whose internal surfaces are totally lined with anechoic material

3.2.2

semi-anechoic chamber

shielded enclosure where all internal surfaces are covered with anechoic material with the exception of the floor, which shall be reflective (ground plane)

3.2.3

modified semi-anechoic chamber

semi-anechoic chamber which has additional absorbers installed on the ground plane

3.3

antenna

transducer which either emits radio-frequency power into space from a signal source or intercepts an arriving electromagnetic field, converting it into an electrical signal

3.4

balun

device for transforming an unbalanced voltage to a balanced voltage or vice versa

[IEV 161-04-34]

3.5

continuous waves (CW)

electromagnetic waves, the successive oscillations of which are identical under steady-state conditions, which can be interrupted or modulated to convey information

3.6

electromagnetic (EM) wave

radiant energy produced by the oscillation of an electric charge characterized by oscillation of the electric and magnetic fields

3.7

far field

region where the power flux density from an antenna approximately obeys an inverse square law of the distance.

For a dipole this corresponds to distances greater than $\lambda/2\pi$, where λ is the wavelength of the radiation

3.8

field strength

The term "field strength" is applied only to measurements made in the far field. The measurement may be of either the electric or the magnetic component of the field and may be expressed as V/m, A/m or W/m²; any one of these may be converted into the others.

NOTE For measurements made in the near field, the term "electric field strength" or "magnetic field strength" is used according to whether the resultant electric or magnetic field, respectively, is measured. In this field region, the relationship between the electric and magnetic field strength and distance is complex and difficult to predict, being dependent on the specific configuration involved. Inasmuch as it is not generally feasible to determine the time and space phase relationship of the various components of the complex field, the power flux density of the field is similarly indeterminate.

3.9

frequency band

continuous range of frequencies extending between two limits

3.10

E_c

field strength applied for calibration

3.11

E_t

carrier field strength applied for testing

3.12

full illumination

test method in which the EUT face being tested fits completely within the UFA (Uniform Field Area).

This test method may be applied for all test frequencies

3.13

human body-mounted equipment

equipment which is intended for use when attached to or held in close proximity to the human body.

This term includes hand-held devices which are carried by people while in operation (e.g. pocket devices) as well as electronic aid devices and implants

3.14

independent windows method

test method (using 0,5 m × 0,5 m UFA) in which the EUT face being tested does not fit completely within the UFA.

This test method may be applied for test frequencies greater than 1 GHz

3.15

induction field

predominant electric and/or magnetic field existing at a distance $d < \lambda/2\pi$, where λ is the wavelength, and the physical dimensions of the source are much smaller than distance d

3.16

intentional RF emitting device

device which radiates (transmits) an electromagnetic field intentionally. Examples include digital mobile telephones and other radio devices

3.17

isotropic

having properties of equal values in all directions

3.18

maximum RMS value

highest short-term RMS value of a modulated RF signal during an observation time of one modulation period.

The short-term RMS is evaluated over a single carrier cycle. For example, in Figure 1b), the maximum RMS voltage is:

$$V_{\text{maximum RMS}} = V_{\text{p-p}} / (2 \times \sqrt{2}) = 1,8 \text{ V}$$

3.19

non-constant envelope modulation

RF modulation schemes in which the amplitude of the carrier wave varies slowly in time compared with the period of the carrier itself. Examples include conventional amplitude modulation and TDMA

3.20

P_c

forward power needed to establish the calibration field strength

3.21

partial illumination

test method (using a minimum sized UFA of 1,5 × 1,5 m) in which the EUT face being tested does not fit completely within the UFA.

This test method may be applied for all test frequencies.

3.22

polarization

orientation of the electric field vector of a radiated field

3.23

shielded enclosure

screened or solid metal housing designed expressly for the purpose of isolating the internal from the external electromagnetic environment. The purpose is to prevent outside ambient electromagnetic fields from causing performance degradation and to prevent emission from causing interference to outside activities

3.24

sweep

continuous or incremental traverse over a range of frequencies

3.25

TDMA (time division multiple access)

time multiplexing modulation scheme which places several communication channels on the same carrier wave at an allocated frequency. Each channel is assigned a time slot during which, if the channel is active, the information is transmitted as a pulse of RF power. If the channel is not active no pulse is transmitted, thus the carrier envelope is not constant. During the pulse, the amplitude is constant and the RF carrier is frequency- or phase-modulated

3.26

transceiver

combination of radio transmitting and receiving equipment in a common housing

3.27

uniform field area (UFA)

hypothetical vertical plane of the field calibration in which variations are acceptably small

The purpose of field calibration is to ensure the validity of the test result See 6.2

4 General

Most electronic equipment is, in some manner, affected by electromagnetic radiation. This radiation is frequently generated by such general purpose sources as the small hand-held radio transceivers that are used by operating, maintenance and security personnel, fixed-station radio and television transmitters, vehicle radio transmitters, and various industrial electromagnetic sources.

In recent years there has been a significant increase in the use of radio telephones and other RF emitting devices operating at frequencies between 0,8 GHz and 6 GHz. Many of these services use modulation techniques with a non-constant envelope (e.g. TDMA). See 5.2

In addition to electromagnetic energy deliberately generated, there is also radiation caused by devices such as welders, thyristors, fluorescent lights, switches operating inductive loads, etc. For the most part, this interference manifests itself as conducted electrical interference and, as such, is dealt with in other parts of the IEC 61000-4 standard series. Methods employed to prevent effects from electromagnetic fields will normally also reduce the effects from these sources.

The electromagnetic environment is determined by the strength of the electromagnetic field. The field strength is not easily measured without sophisticated instrumentation nor is it easily calculated by classical equations and formulas because of the effect of surrounding structures or the proximity of other equipment that will distort and/or reflect the electromagnetic waves.

5 Test levels

The test levels are given in Table 1.

Table 1 – Test levels related to general purpose, digital radio telephones and other RF emitting devices

Level	Test field strength V/m
1	1
2	3
3	10
4	30
x	Special
NOTE: x is an open test level and the associated field strength may be any value. This level may be given in the product standard	

IS 14700 (Part 4/Sec 3) : 2008
IEC 61000-4-3 : 2006

This standard does not suggest that a single test level is applicable over the entire frequency range. Product committees shall select the appropriate test level for each frequency range needing to be tested as well as the frequency ranges. See Annex E for a guidance for product committees on the selection of test levels.

The test field strength column gives values of the unmodulated carrier signal. For testing of equipment, this carrier signal is 80 % amplitude modulated with a 1 kHz sine wave to simulate actual threats (see Figure 1). Details of how the test is performed are given in Clause 8.

5.1 Test levels related to general purposes

The tests are normally performed without gaps in the frequency range 80 MHz to 1 000 MHz.

NOTE 1 Product committees may decide to choose a lower or higher transition frequency than 80 MHz between IEC 61000-4-3 and IEC 61000-4-6 (see Annex G).

NOTE 2 Product committees may select alternative modulation schemes for equipment under test.

NOTE 3 IEC 61000-4-6 also defines test methods for establishing the immunity of electrical and electronic equipment against radiated electromagnetic energy. It covers frequencies below 80 MHz.

5.2 Test levels related to the protection against RF emissions from digital radio telephones and other RF emitting devices

The tests are normally performed in the frequency ranges 800 MHz to 960 MHz and 1,4 GHz to 6,0 GHz.

The frequencies or frequency bands to be selected for the test are limited to those where mobile radio telephones and other intentional RF emitting devices actually operate. It is not intended that the test needs to be applied continuously over the entire frequency range from 1,4 GHz to 6 GHz. For those frequency bands used by mobile radio telephones and other intentional RF emitting devices, specific test levels may be applied in the corresponding frequency range of operation.

Also if the product is intended to conform only to the requirements of particular countries, the measurement range 1,4 GHz to 6 GHz may be reduced to cover just the specific frequency bands allocated to digital mobile telephones and other intentional RF emitting devices in those countries. In this situation, the decision to test over reduced frequency ranges shall be documented in the test report.

NOTE 1 Annex A contains an explanation regarding the decision to use sine wave modulation for tests related to protection against RF emissions from digital radio telephones and other intentional RF emitting devices.

NOTE 2 Annex E contains guidance with regard to selecting test levels.

NOTE 3 The measurement ranges for Table 2 are the frequency bands generally allocated to digital radio telephones (Annex G contains the list of frequencies known to be allocated to specific digital radio telephones at the time of publication).

NOTE 4 The primary threat above 800 MHz is from radio telephone systems and other intentional RF emitting devices with power levels similar to that of radio telephones. Other systems operating in this frequency range, e.g. radio LANs operating at 2,4 GHz or higher frequencies, are generally very low power (typically lower than 100 mW), so they are much less likely to present significant problems.

6 Test equipment

The following types of test equipment are recommended:

- *Anechoic chamber*: of a size adequate to maintain a uniform field of sufficient dimensions with respect to the equipment under test (EUT). Additional absorbers may be used to damp reflections in chambers which are not fully lined.
- *EMI filters*: care shall be taken to ensure that the filters introduce no additional resonance effects on the connected lines.
- *RF signal generator(s)* capable of covering the frequency band of interest and of being amplitude modulated by a 1 kHz sine wave with a modulation depth of 80%. They shall have manual control (e.g., frequency, amplitude, modulation index) or, in the case of RF synthesizers, they shall be programmable with frequency-dependent step sizes and dwell times.

The use of low-pass or band-pass filters may be necessary to avoid problems caused by harmonics.

- *Power amplifiers*: to amplify signal (unmodulated and modulated) and provide antenna drive to the necessary field level. The harmonics generated by the power amplifier shall be such that any measured field strength in the UFA at each harmonic frequency shall be at least 6 dB below that of the fundamental frequency (see Annex D).
- *Field generating antennas* (see Annex B): biconical, log periodic, horn or any other linearly polarized antenna system capable of satisfying frequency requirements.
- *An isotropic field sensor* with adequate immunity of any head amplifier and optoelectronics to the field strength to be measured, and a fibre optic link to the indicator outside the chamber. An adequately filtered signal link may also be used.
- *Associated equipment to record the power levels* necessary for the required field strength and to control the generation of that level for testing.

Care shall be taken to ensure adequate immunity of the auxiliary equipment.

6.1 Description of the test facility

Because of the magnitude of the field strengths generated, the tests shall be made in a shielded enclosure in order to comply with various national and international laws prohibiting interference to radio communications. In addition, since most test equipment used to collect data is sensitive to the local ambient electromagnetic field generated during the execution of the immunity test, the shielded enclosure provides the necessary "barrier" between the EUT and the required test instrumentation. Care shall be taken to ensure that the interconnection wiring penetrating the shielded enclosure adequately attenuates the conducted and radiated emission and preserves the integrity of the EUT signal and power responses.

The test facility typically consists of an absorber-lined shielded enclosure large enough to accommodate the EUT whilst allowing adequate control over the field strengths. This includes anechoic chambers or modified semi-anechoic chambers, an example of which is shown in Figure 2. Associated shielded enclosures should accommodate the field generating and monitoring equipment, and the equipment which exercises the EUT.

Anechoic chambers are less effective at lower frequencies. Particular care shall be taken to ensure the uniformity of the generated field at the lower frequencies. Further guidance is given in Annex C.

6.2 Calibration of field

The purpose of field calibration is to ensure that the uniformity of the field over the test sample is sufficient to ensure the validity of the test results. IEC 61000-4-3 uses the concept of a uniform field area (UFA, see Figure 3), which is a hypothetical vertical plane of the field in which variations are acceptably small. In a common procedure (field calibration), the capability of the test facility and the test equipment to generate such a field is demonstrated. At the same time, a database for setting the required field strength for the immunity test is obtained. The field calibration is valid for all EUTs whose individual faces (including any cabling) can be fully covered by the UFA.

The field calibration is performed with no EUT in place (see Figure 3). In this procedure, the relationship between field strength within the UFA and forward power applied to the antenna is determined. During the test, the required forward power is calculated from this relationship and the target field strength. The calibration is valid as long as the test setup used for it remains unchanged for testing, therefore the calibration setup (antenna, additional absorber, cables, etc.) shall be recorded. It is important that the exact position, as much as is reasonably possible, of the generating antennas and cables is documented. Since even small displacements may significantly affect the field, the same positions shall be used also for the immunity test.

It is intended that the full field calibration process should be carried out annually and when changes have been made in the enclosure configuration (absorber replaced, area moved, equipment changed, etc.). Before each batch of testing (see Clause 8), the validity of the calibration shall be checked.

The transmitting antenna shall be placed at a distance sufficient to allow the UFA to fall within the beam of the transmitted field. The field sensor shall be at least 1 m from the field generating antenna. A distance of 3 m between the antenna and the UFA is preferred (see Figure 3). This dimension is measured from the centre of a biconical antenna, or the front tip of a log periodic or combination antenna, or from the front edge of horn or double ridge wave guide antenna. The calibration record and the test report shall state the distance used.

Unless the EUT and its wires can be fully illuminated within a smaller surface, the size of the UFA is at least 1,5 m x 1,5 m with its lower edge established at a height of 0,8 m above the floor. The size of the UFA shall not be less than 0,5 m x 0,5 m. During the immunity test, the EUT shall have the face to be illuminated coincident with this UFA (see Figures 5 and 6).

In order to establish the severity of the test for EUTs and cabling which must be tested close to the floor (earth reference plane), the magnitude of the field is also recorded at 0,4 m height. The obtained data is documented in the calibration record but is not considered for the suitability of the test facility and for the calibration database.

Due to reflections at the floor in a semi-anechoic room, it is difficult to establish a UFA close to an earth reference plane. Additional absorbing material on the earth reference plane may solve this problem (see Figure 2).

The UFA is subdivided into a grid with a grid spacing of 0,5 m (see Figure 4 as an example of an 1,5 m x 1,5 m UFA). At each frequency, a field is considered uniform if its magnitude measured at the grid points is within ${}^{-0}_{+6}$ dB of the nominal value for not less than 75 % of all grid points (e.g. if at least 12 of the 16 points of an 1,5 m x 1,5 m UFA measured are within the tolerance). For the minimum UFA of 0,5 m x 0,5 m, the field magnitude for all four grid points shall lie within this tolerance.

NOTE 1 At different frequencies, different measuring points may be within the tolerance

The tolerance has been expressed as $^{-0}_{+6}$ dB to ensure that the field strength does not fall below nominal with an acceptable probability. The tolerance of 6 dB is considered to be the minimum achievable in practical test facilities.

In the frequency range up to 1 GHz, a tolerance greater than +6 dB, up to +10 dB, but not less than -0 dB is allowed for a maximum of 3 % of the test frequencies, provided that the actual tolerance is stated in the test report. In case of dispute, the $^{-0}_{+6}$ dB tolerance takes precedence.

If the area intended to be occupied by the face of the actual EUT is larger than 1,5 m x 1,5 m and an UFA with sufficient dimensions (preferred method) can not be realised, then the area to be occupied by the EUT may be illuminated in a series of tests ("partial illumination") Either:

- a calibration shall be performed at different radiating antenna locations so that the combined UFAs cover the area which will be occupied by the face of the EUT, and the EUT shall then be tested with the antenna in each of these positions successively,
- or the EUT shall be moved to different positions so that each part of it falls within the UFA during at least one of these tests.

NOTE 2 Each of the antenna positions requires a full field calibration.

Table 2 below demonstrates the concepts of full illumination and partial illumination as well as where and how they can be applied.

Table 2 – Requirements for uniform field area for application of full illumination, partial illumination and independent windows method

Frequency range	Requirements of UFA size and calibration when the EUT fits completely within UFA (Full Illumination, the preferred method)	Requirements of UFA size and calibration when the EUT does not fit completely within UFA (Partial Illumination and Independent Windows, the alternative methods)
Less than 1 GHz	Minimum UFA size 0,5 m x 0,5 m UFA size in 0,5 m grid size steps (e.g., 0,5 m x 0,5 m; 0,5 m x 1,0 m; 1,0 m x 1,0 m; etc) Calibration in 0,5 m x 0,5 m grid steps 75 % of calibration points within specifications if UFA is larger than 0,5 m x 0,5 m. 100 % (all 4 points) must be in specifications for 0,5 m x 0,5 m UFA.	PARTIAL ILLUMINATION Minimum UFA size 1,5 m x 1,5 m UFA size in 0,5 m grid size steps (e.g., 1,5 m x 1,5 m; 1,5 m x 2,0 m; 2,0 m x 2,0 m; etc) Calibration in 0,5 m x 0,5 m grid steps 75 % of calibration points within specifications

Table 2 (continued)

Frequency range	Requirements of UFA size and calibration when the EUT fits completely within UFA (Full Illumination, the preferred method)	Requirements of UFA size and calibration when the EUT does not fit completely within UFA (Partial Illumination and Independent Windows, the alternative methods)
Greater than 1 GHz	Minimum UFA size 0,5 m × 0,5 m UFA size in 0,5 m grid size steps (e.g., 0,5 m × 0,5 m; 0,5 m × 1,0 m; 1,0 m × 1,0 m; etc) Calibration in 0,5 m × 0,5 m grid steps 75 % of calibration points within specifications if UFA is larger than 0,5 m × 0,5 m. 100 % (all 4 points) must be in specifications for 0,5 m × 0,5 m UFA.	INDEPENDENT WINDOWS METHOD 0,5 m × 0,5 m window (See Annex H) PARTIAL ILLUMINATION 1,5 m × 1,5 m and larger size windows in 0,5 m increments (e.g., 1,5 m × 2,0 m; 2,0 m × 2,0 m; etc) Calibration in 0,5 m × 0,5 m grid steps 75 % of calibration points within specifications if UFA is larger than 0,5 m × 0,5 m. 100 % (all 4 points) must be in specifications for 0,5 m × 0,5 m UFA.

If the requirements of this subclause can only be satisfied up to a certain limiting frequency (higher than 1 GHz), for example because the beam width of the antenna is insufficient to illuminate the entire EUT, then for frequencies higher than this, a second alternative method (known as "the independent window method"), described in Annex H, may be used.

Generally the calibration of the field in anechoic and semi-anechoic chambers has to be performed using the test setup shown in Figure 7. The calibration shall always be performed with an unmodulated carrier for both horizontal and vertical polarisations in accordance with the steps given below. It is required to ensure that the amplifiers can handle the modulation and are not saturated during testing. The preferred method to ensure the amplifiers are not saturated during testing is to carry out the calibration with a field strength at least 1,8 times as high as the field strength to be applied to the EUT. Denote this calibration field strength by E_c . E_c is the value which is applicable only to field calibration. The test field strength E_t shall not exceed $E_c / 1,8$.

NOTE 3 Other methods to ensure avoiding saturation may be used.

Two different calibration methods are described below using an 1,5 m × 1,5 m UFA (16 grid points) as an example. These methods are considered to give the same field uniformity.

6.2.1 Constant field strength calibration method

The constant field strength of the uniform field shall be established and measured via a calibrated field sensor at each particular frequency and at each of the 16 points one after the other (see Figure 4) using the step size given in Clause 8, by adjusting the forward power accordingly.

The forward power necessary to establish the field strength chosen shall be measured in accordance with Figure 7 and is to be recorded in dBm for the 16 points.

Procedure to be followed at both horizontal and vertical polarisations:

- a) Position the sensor at one of the 16 points in the grid (see Figure 4), and set the frequency of the signal generator output to the lowest frequency in the range of the test (for example 80 MHz).
- b) Adjust the forward power to the field-generating antenna so that the field strength obtained is equal to the required calibration field strength E_c . Record the forward power reading.
- c) Increase the frequency by a maximum of 1 % of the present frequency.
- d) Repeat steps b) and c) until the next frequency in the sequence would exceed the highest frequency in the range of the test. Finally, repeat step b) at this highest frequency (for example 1 GHz).
- e) Repeat steps a) to d) for each point in the grid.

At each frequency:

- f) Sort the 16 forward power readings into ascending order.
- g) Start at the highest value and check if at least the 11 readings below this value are within the tolerance of -6 dB to +0 dB of that value.
- h) If they are not within this tolerance of -6 dB to +0 dB, go back to the same procedure, starting by the reading immediately below and so on (notice that there are only five possibilities for each frequency).
- i) Stop the procedure if at least 12 numbers are within 6 dB and record the maximum forward power out of the numbers. Denote this forward power by P_c .
- j) Confirm that the test system (e.g. the power amplifier) is not in saturation. Assuming that E_c has been chosen as 1,8 times E_t , perform the following procedure at each calibration frequency:
 - j-1) Decrease the output from the signal generator by 5,1 dB from the level needed to establish a forward power of P_c , as determined in the above steps. (-5,1 dB is the same as $E_c/1,8$);
 - j-2) Record the new forward power delivered to the antenna;
 - j-3) Subtract the forward power measured in step j-2 from P_c . If the difference is between 3,1 and 5,1 dB, then the amplifier is not saturated and the test system sufficient for testing. If the difference is less than 3,1 dB, then the amplifier is saturated and is not suitable for testing.

NOTE 1 If at a specific frequency, the ratio between E_c and E_t is $R(\text{dB})$, where $R = 20 \log(E_c/E_t)$, then the test power $P_t = P_c - R(\text{dB})$. The subscripts c and t refer to calibration and test respectively. The field is modulated in accordance with Clause 8.

A description of an example for the calibration is given in D.4.1.

NOTE 2 At each frequency it has to be ensured that the amplifier used is not saturated. This can best be done by checking the 1 dB compression of the amplifier. However, the 1 dB compression of the amplifier is verified with a 50 Ω termination when the impedance of an antenna to be used for the test is different from 50 Ω . The saturation of the test system is assured by confirming the 2 dB compression point described to step j). For more information refer to the Annex D.

6.2.2 Constant power calibration method

The field strength of the uniform field shall be established and measured via a calibrated field sensor at each particular frequency and at each of the 16 points one after the other (see Figure 4) using the step size given in Clause 8, by adjusting the forward power accordingly.

IS 14700 (Part 4/Sec 3) : 2008
IEC 61000-4-3 : 2006

The forward power necessary to establish the field strength at the starting position shall be measured in accordance with Figure 7 and noted. The same forward power shall be applied for all 16 positions. The field strength created by this forward power is to be recorded at each of the 16 points.

Procedure to be followed at both horizontal and vertical polarisations:

- a) Position the sensor at one of the 16 points in the grid (see Figure 4), and set the frequency of the signal generator output to the lowest frequency in the range of the test (for example 80 MHz).
- b) Apply a forward power to the field-generating antenna so that the field strength obtained equals E_c (taking into account that the test field will be modulated). Record the forward power and field strength readings.
- c) Increase the frequency by a maximum of 1% of the present frequency.
- d) Repeat steps b) and c) until the next frequency in the sequence would exceed the highest frequency in the range of the test. Finally, repeat step b) at this highest frequency (for example 1 GHz).
- e) Move the sensor to another position in the grid. At each of the frequencies and used in steps a) to d), apply the forward power recorded in step b) for that frequency, and record the field strength reading.
- f) Repeat step e) for each point in the grid.

At each frequency :

- g) Sort the 16 field strength readings into ascending order.
- h) Select one field strength as the reference and calculate the deviation from this reference for all other positions in decibels.
- i) Start at the lowest value of the field strength and check if at least 11 readings above this value are within the tolerance of $\begin{smallmatrix} -0 \\ +6 \end{smallmatrix}$ dB of that lowest value.
- j) If they are not within the tolerance of $\begin{smallmatrix} -0 \\ +6 \end{smallmatrix}$ dB, go back to the same procedure, starting by the reading immediately above and so on (notice that there are only five possibilities for each frequency).
- k) Stop the procedure if at least 12 numbers are within 6 dB and take from these numbers the position where the minimum field strength was obtained as the reference.
- l) Calculate the forward power necessary to create the required field strength in the reference position. Denote this forward power by P_c .
- m) Confirm that the test system (e. g. the power amplifier) is not in saturation. Assuming that E_c has been chosen as 1,8 times E_t , perform the following procedure at each calibration frequency:
 - m-1) Decrease the output from the signal generator by 5,1 dB from the level needed to establish a forward power of P_c , as determined in the above steps. (-5,1 dB is the same as $E_c/1,8$.)
 - m-2) Record the new forward power delivered to the antenna.
 - m-3) Subtract the forward power measured in step m-2 from P_c . If the difference is between 3,1 dB and 5,1 dB, then the amplifier is not saturated and the test system is sufficient for testing. If the difference is less than 3,1 dB, then the amplifier is saturated and is not suitable for testing.

NOTE 1 If at a specific frequency, the ratio between E_c and E_t is $R(\text{dB})$, where $R = 20 \log(E_c/E_t)$, then the test power $P_t = P_c - R(\text{dB})$. The subscripts c and t refer to calibration and test respectively. The field is modulated in accordance with Clause 8.

A description of an example for the calibration is given in D.4.2.

NOTE 2 At each frequency it has to be ensured that the amplifier used is not saturated. This can best be done by checking the 1 dB compression of the amplifier. However, the 1 dB compression of the amplifier is verified with a 50 Ω termination when the impedance of an antenna to be used for the test is different from 50 Ω . The saturation of the test system is assured by confirming the 2 dB compression point described to step m). For more information refer to the Annex D.

7 Test setup

All testing of equipment shall be performed in a configuration as close as possible to actual installation conditions. Wiring shall be consistent with the manufacturer's recommended procedures, and the equipment shall be in its housing with all covers and access panels in place, unless otherwise stated.

If the equipment is designed to be mounted in a panel, rack or cabinet, it shall be tested in this configuration.

A metallic ground plane is not required. When a means is required to support the test sample, it shall be constructed of a non-metallic, non-conductive material. Low dielectric constant (low permittivity) materials, such as rigid polystyrene, should be considered. However, grounding of housing or case of the equipment shall be consistent with the manufacturer's installation recommendations.

When an EUT consists of floor-standing and table-top components, the correct relative positions shall be maintained.

Typical EUT setups are shown in Figures 5 and 6.

NOTE 1 Non-conductive supports are used to prevent accidental earthing of the EUT and distortion of the field. To ensure the latter, the support should be bulk non-conductive, rather than an insulating coating on a metallic structure.

NOTE 2 At higher frequencies (e.g., above 1 GHz), tables or supports made from wood or glass reinforced plastic can be reflective. So, a low dielectric constant (low permittivity) material, such as rigid polystyrene, should be used to avoid field perturbations and to reduce degradation of field uniformity.

7.1 Arrangement of table-top equipment

The equipment to be tested is placed in the test facility on a non-conductive table 0,8 m high.

The equipment is then connected to power and signal wires according to relevant installation instructions.

7.2 Arrangement of floor-standing equipment

Floor-standing equipment should be mounted on a non-conductive support 0,05 m to 0,15 m above the supporting plane. The use of non-conductive supports prevents accidental earthing of the EUT and distortion of the field. To ensure the latter, the support shall be bulk non-conducting, rather than an insulating coating on a metallic structure. Floor-standing equipment which is capable of being stood on a non-conductive 0,8 m high platform, i.e. equipment which is not too large or heavy, or where its elevation would not create a safety hazard, may be so arranged. This variation in the standard method of test shall be recorded in the test report.

NOTE Non-conductive rollers may be used as the 0,05 m to 0,15 m support.

The equipment is then connected to power and signal wires according to relevant installation instructions.

7.3 Arrangement of wiring

Cables shall be attached to the EUT and arranged on the test site according to the manufacturer's installation instructions and shall replicate typical installations and use as much as possible.

The manufacturer's specified wiring types and connectors shall be used. If the wiring to and from the EUT is not specified, unshielded parallel conductors shall be used.

If the manufacturer's specification requires a wiring length of less than or equal to 3 m, then the specified length shall be used. If the length specified is greater than 3 m or is not specified, then the length of cable used shall be chosen according to typical installation practices. If possible, a minimum of 1 m of cable is exposed to the electromagnetic field. Excess length of cables interconnecting units of the EUT shall be bundled low-inductively in the approximate center of the cable to form a bundle 30 cm to 40 cm in length.

If a product committee determines excess cable length needs to be decoupled (for example, for cables leaving the test area), then the decoupling method used shall not impair the operation of the EUT.

7.4 Arrangement of human body-mounted equipment

Human body-mounted equipment (see Definition 3.13) may be tested in the same manner as table top items. However, this may involve over-testing or under-testing because the characteristics of the human body are not taken into account. For this reason, product committees are encouraged to specify the use of a human body simulator with appropriate dielectric characteristics.

8 Test procedure

The test procedure includes:

- the verification of the laboratory reference conditions;
- the preliminary verification of the correct operation of the equipment;
- the execution of the test;
- the evaluation of the test results.

8.1 Laboratory reference conditions

In order to minimize the effect of environmental parameters on test results, the test shall be carried out in climatic and electromagnetic reference conditions as specified in 8.1.1 and 8.1.2.

8.1.1 Climatic conditions

Unless otherwise specified by the committee responsible for the generic or product standard, the climatic conditions in the laboratory shall be within any limits specified for the operation of the EUT and the test equipment by their respective manufacturers.

Tests shall not be performed if the relative humidity is so high as to cause condensation on the EUT or the test equipment.

NOTE Where it is considered that there is sufficient evidence to demonstrate that the effects of the phenomenon covered by this standard are influenced by climatic conditions, this should be brought to the attention of the committee responsible for this standard.

8.1.2 Electromagnetic conditions

The electromagnetic conditions of the laboratory shall be such to guarantee the correct operation of the EUT in order not to influence the test results.

8.2 Execution of the test

The test shall be carried out on the basis of a test plan that shall include the verification of the performances of the EUT as defined in the technical specification.

The EUT shall be tested in normal operating conditions.

The test plan shall specify:

- the size of the EUT;
- representative operating conditions of the EUT;
- whether the EUT shall be tested as table-top or floor-standing, or a combination of the two;
- for floor-standing equipment, the height of the support;
- the type of test facility to be used and the position of the radiating antennas;
- the type of antennas to be used;
- the frequency range, dwell time and frequency steps;
- the size and shape of the uniform field area;
- whether any partial illumination is used;
- the test level to be applied;
- the type(s) and number of interconnecting wires used and the interface port (of the EUT) to which these are to be connected;
- the performance criteria which are acceptable;
- a description of the method used to exercise the EUT.

The test procedures described in this clause are for the use of field generating antennas as defined in Clause 6.

Before testing the intensity of the calibrated field strength should be checked to verify that the test equipment/system is operating properly.

After the calibration has been verified, the test field can be generated using the values obtained from the calibration (see 6.2).

The EUT is initially placed with one face coincident with the calibration plane. The EUT face being illuminated shall be contained within the UFA unless partial illumination is being applied. See Clause 6.2 regarding field calibration and use of partial illumination.

The frequency ranges to be considered are swept with the signal modulated according to 5.1 and 5.2, pausing to adjust the RF signal level or to switch oscillators and antennas as necessary. Where the frequency range is swept incrementally, the step size shall not exceed 1 % of the preceding frequency value.

The dwell time of the amplitude modulated carrier at each frequency shall not be less than the time necessary for the EUT to be exercised and to respond, but shall in no case be less than 0,5 s. The sensitive frequencies (e.g., clock frequencies) shall be analyzed separately according to the requirements in product standards.

IS 14700 (Part 4/Sec 3) : 2008
IEC 61000-4-3 : 2006

The test shall normally be performed with the generating antenna facing each side of the EUT. When equipment can be used in different orientations (i.e. vertical or horizontal) all sides shall be exposed to the field during the test. When technically justified, some EUTs can be tested by exposing fewer faces to the generating antenna. In other cases, as determined for example by the type and size of EUT or the frequencies of test, more than four azimuths may need to be exposed.

NOTE 1 As the electrical size of the EUT increases, the complexity of its antenna pattern also increases. The antenna pattern complexity can affect the number of test orientations necessary to determine minimum immunity.

NOTE 2 If an EUT consists of several components, it is not necessary to modify the position of each component within the EUT while illuminating it from different sides.

The polarization of the field generated by each antenna necessitates testing each selected side twice, once with the antenna positioned vertically and again with the antenna positioned horizontally.

Attempts shall be made to fully exercise the EUT during testing, and to interrogate all the critical exercise modes selected for the immunity test. The use of special exercising programmes is recommended.

9 Evaluation of test results

The test results shall be classified in terms of the loss of function or degradation of performance of the equipment under test, relative to a performance level defined by its manufacturer or the requestor of the test, or agreed between the manufacturer and the purchaser of the product. The recommended classification is as follows:

- a) normal performance within limits specified by the manufacturer, requestor or purchaser;
- b) temporary loss of function or degradation of performance which ceases after the disturbance ceases, and from which the equipment under test recovers its normal performance, without operator intervention;
- c) temporary loss of function or degradation of performance, the correction of which requires operator intervention;
- d) loss of function or degradation of performance which is not recoverable, owing to damage to hardware or software, or loss of data.

The manufacturer's specification may define effects on the EUT which may be considered insignificant, and therefore acceptable.

This classification may be used as a guide in formulating performance criteria, by committees responsible for generic, product and product-family standards, or as a framework for the agreement on performance criteria between the manufacturer and the purchaser, for example where no suitable generic, product or product-family standard exists.

10 Test report

The test report shall contain all the information necessary to reproduce the test. In particular, the following shall be recorded:

- the items specified in the test plan required by Clause 8 of this standard;
- identification of the EUT and any associated equipment, for example, brand name, product type, serial number,

- identification of the test equipment, for example, brand name, product type, serial number;
- any special environmental conditions in which the test was performed;
- any specific conditions necessary to enable the test to be performed;
- performance level defined by the manufacturer, requestor or purchaser;
- performance criterion specified in the generic, product or product-family standard;
- any effects on the EUT observed during or after the application of the test disturbance, and the duration for which these effects persist;
- the rationale for the pass/fail decision (based on the performance criterion specified in the generic, product or product-family standard, or agreed between the manufacturer and the purchaser);
- any specific conditions of use, for example cable length or type, shielding or grounding, or EUT operating conditions, which are required to achieve compliance;
- a complete description of the cabling and equipment position and orientation shall be included in the test report; in some cases a picture may be sufficient for that.


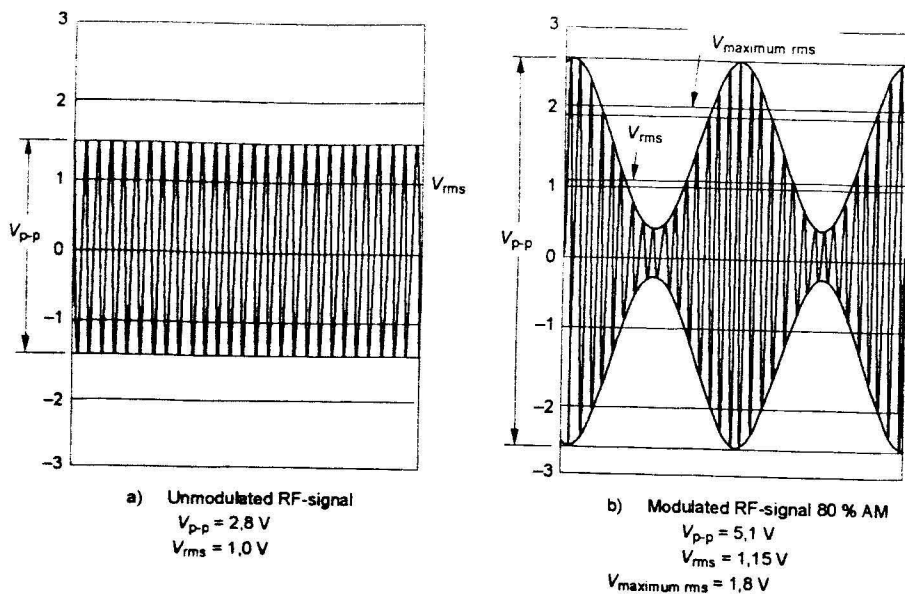


Figure 1 – Definition of the test level and the waveshapes occurring at the output of the signal generator

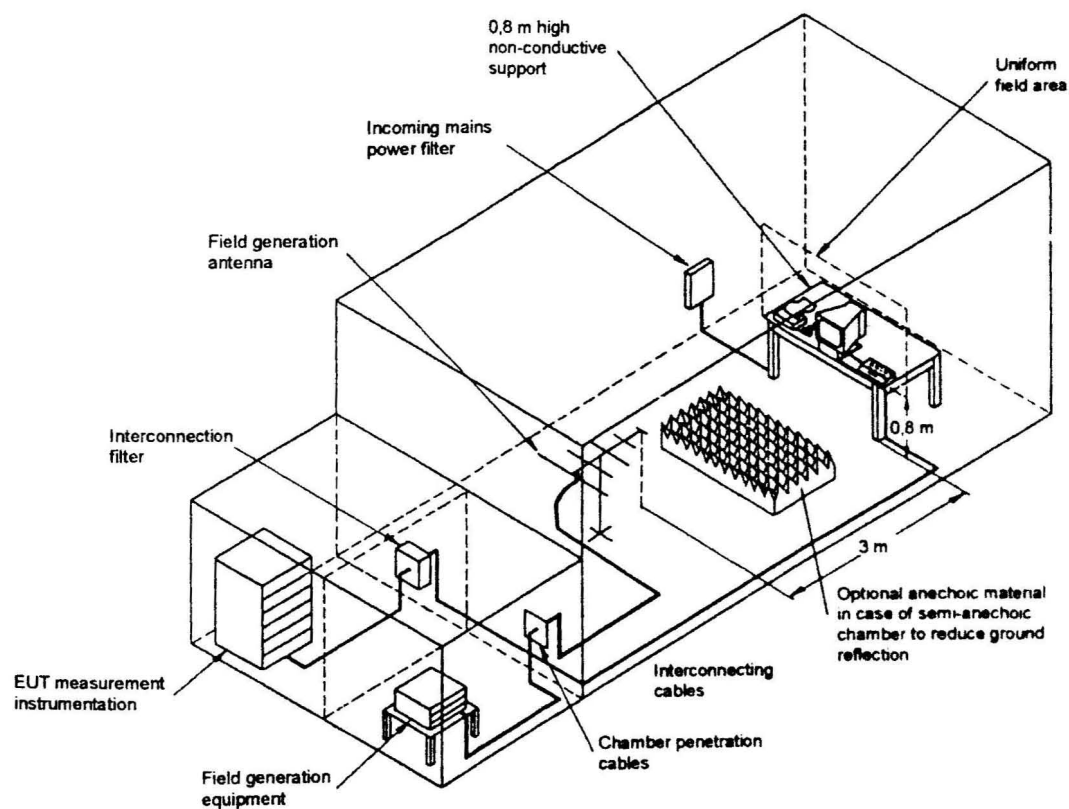

NOTE Anechoic lining material on walls and ceiling has been omitted for clarity.

Figure 2 – Example of suitable test facility

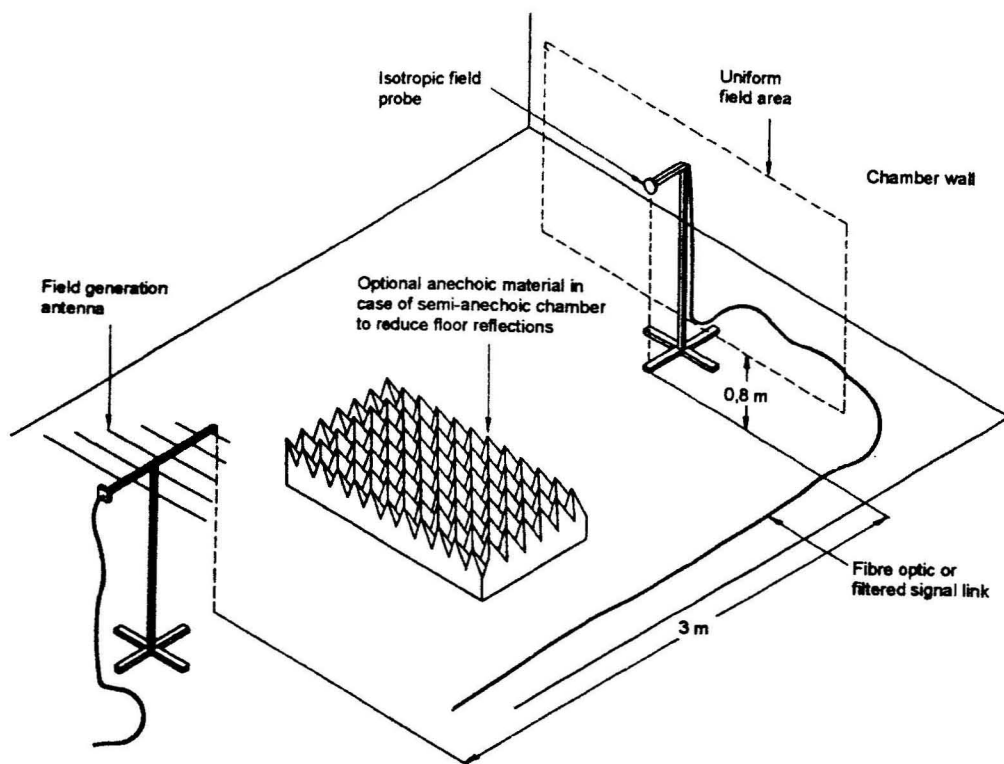


Figure 3 – Calibration of field


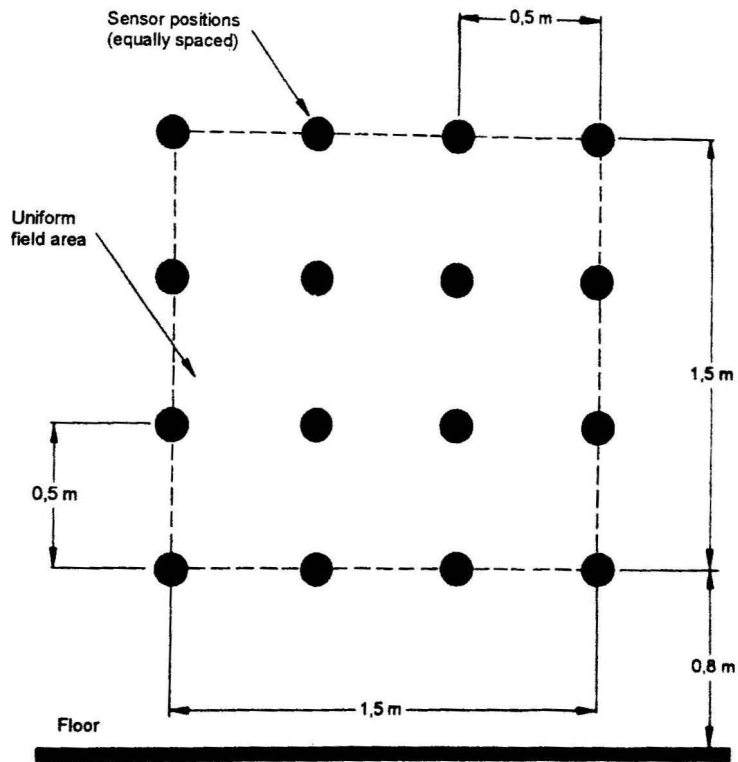


Figure 4 – Calibration of field, dimensions of the uniform field area

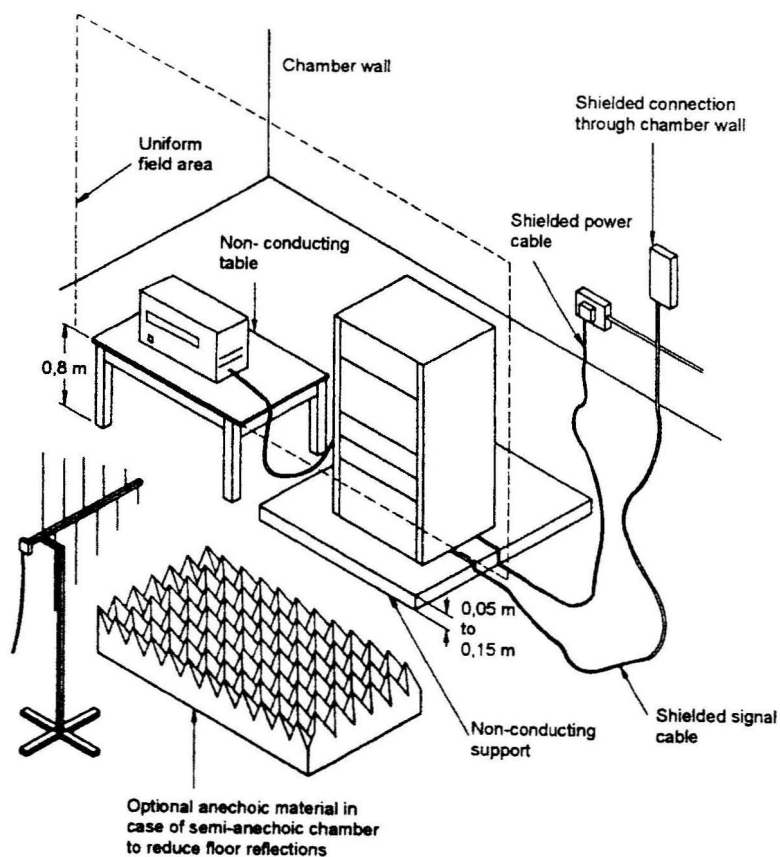

NOTE Anechoic lining material has been omitted from walls for clarity.

Figure 5 – Example of test setup for floor-standing equipment


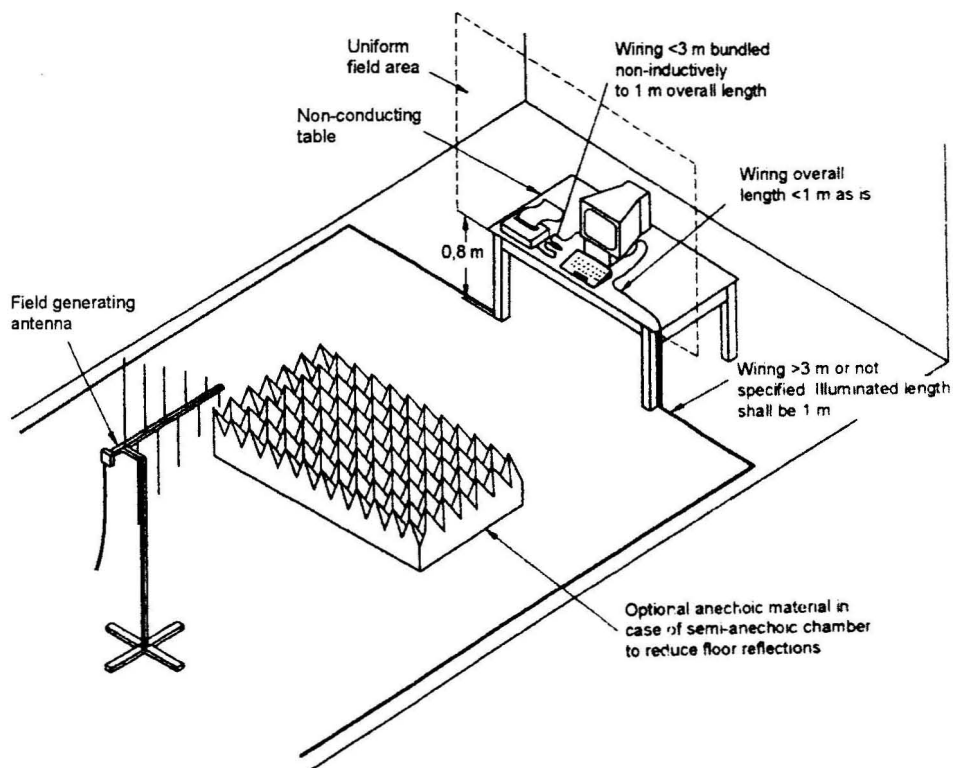


Figure 6 – Example of test setup for table-top equipment

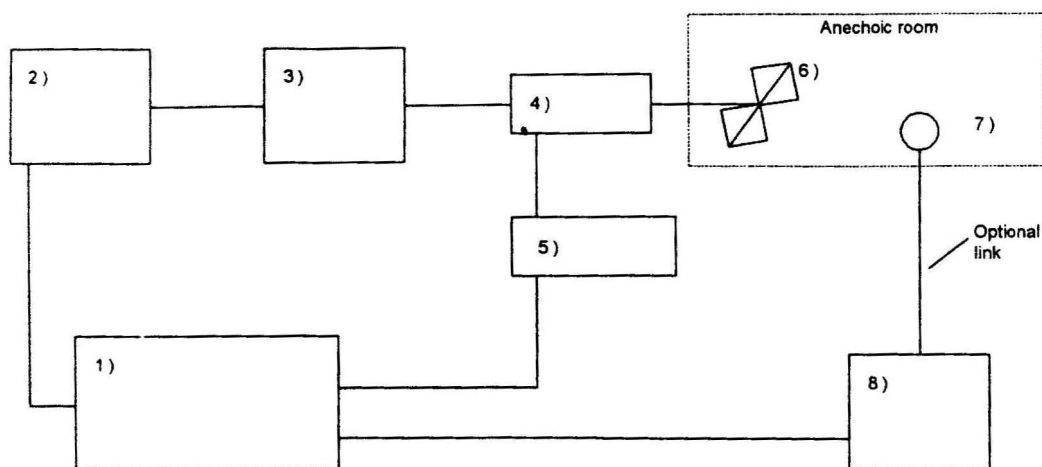

- 1) Controller, for example PC
- 2) Signal generator
- 3) Power amplifier
- 4) Directional coupler *
- 5) Measuring instrument *
- 6) Transmitting antenna
- 7) Field sensor
- 8) Field meter

* The directional coupler and power meter may be replaced by a forward power detector or monitor inserted between amplifier 3) and antenna 6)

Figure 7 – Measuring set-up

Annex A
(informative)

**Rationale for the choice of modulation for tests related to the protection
against RF emissions from digital radio telephones**

A.1 Summary of available modulation methods

The essential threat above 800 MHz comes from digital radio telephones using non-constant envelope modulation. During the development of this standard, the following modulation methods were considered for the electromagnetic field:

- sine wave amplitude modulation, 80 % AM at 1 kHz rate;
- square wave amplitude modulation, 1:2 duty cycle, 100 % AM at 200 Hz rate;
- pulsed RF signal approximately simulating the characteristics of each system, e.g. 1:8 duty cycle at 200 Hz for GSM, 1:24 duty cycle at 100 Hz for DECT portables, etc. (see Annex G for definitions of GSM and DECT);
- pulsed RF signal simulating exactly the characteristics of each system, e.g. for GSM: 1:8 duty cycle at 200 Hz plus secondary effects such as discontinuous transmission mode (2 Hz modulation frequency) and multi-frame effects (8 Hz frequency component).

The merits of the respective systems are summarised in Table A.1.

Table A.1 – Comparison of modulation methods
(see Annex G for definitions of GSM and DECT)

Modulation method	Advantages	Disadvantages
Sine wave AM	1 Experimentation has shown that good correlation may be established between the interfering effects of different types of non-constant envelope modulation provided the maximum RMS levels remains the same. 2 It is not necessary to specify (and measure) the rise time of the TDMA pulse. 3 Used in this standard and in IEC 61000-4-6. 4 Field generation and monitoring equipment is readily available. 5 For analogue audio equipment, demodulation in the equipment under test produces an audio response which can be measured with a narrow band level meter, thereby reducing background noise. 6 Has already been shown to be effective at simulating the effects of other modulation types (e.g. FM, phase modulation, pulse modulation) at lower frequencies.	1 Does not simulate TDMA. 2 Slight over-test for second law receptors. 3 May miss some failure mechanisms.
Square wave AM	1 Similar to TDMA. 2 Can be applied universally. 3 May reveal "unknown" failure mechanisms (sensitive to the large rate of change of the RF envelope).	1 Does not exactly simulate TDMA. 2 Requires non-standard equipment to generate the signal. 3 Demodulation in EUT produces a broadband audio response which shall be measured with a broadband level meter, thereby raising background noise. 4 Necessary to specify the rise time.
Pulsed RF	1 Good simulation of TDMA. 2 May reveal "unknown" failure mechanisms (sensitive to the large rate of change of the RF envelope).	1 Requires non-standard equipment to generate the signal. 2 The details of the modulation need to be varied to match each of the different systems (e.g. GSM, DECT, etc.). 3 Demodulation in EUT produces a broadband audio response which shall be measured with a broadband level meter, thereby raising background noise. 4 Necessary to specify the rise time.

A.2 Experimental results

A series of experiments has been performed to assess the correlation between the modulation method used for the disturbing signal and the interference produced.

The modulation methods investigated were as follows:

- a) sine wave 80 % AM at 1 kHz;
- b) "GSM-like" pulsed RF, duty cycle 1:8 at 200 Hz;
- c) "DECT-like" pulsed RF, duty cycle 1:2 at 100 Hz (base station);
- d) "DECT-like" pulsed RF, duty cycle 1:24 at 100 Hz (portable).

Only one of the "DECT-like" modulations was used in each case.

The results are summarised in Tables A.2 and A.3.

Table A.2 – Relative interference levels ^a

Modulation method ^b		Sine wave 80 % AM at 1 kHz	"GSM-like" duty cycle 1:8 at 200 Hz	"DECT-like" duty cycle 1:24 at 100 Hz
↓ Equipment	↓ Audio response	dB	dB	dB
Hearing aid ^c	Unweighted 21 Hz – 21 kHz	0 ^d	0	-3
	A-weighted	0	-4	-7
Analogue telephone set ^e	Unweighted	0 ^d	-3	-7
	A-weighted	-1	-6	-8
Radio set ^f	Unweighted	0 ^d	+1	-2
	A-weighted	-1	-3	-7

^a The audio response to the disturbance is the interference level. A low interference level means a high-immunity level.

^b Important: the carrier amplitude is adjusted so that the maximum RMS value (see Clause 3) of the disturbing signal (exposure) is the same for all modulations.

^c The exposure is produced by an incident electromagnetic field at 900 MHz. The duty cycle for the DECT-like modulation is 1:2 instead of 1:24. The audio response is the acoustical output measured with an artificial ear connected via a 0,5 m PVC tube.

^d This case is chosen as the reference audio response, i.e. 0 dB.

^e The exposure is an RF current injected into the telephone cable at 900 MHz. The audio response is the audio-frequency voltage measured on the telephone line.

^f The exposure is an RF current injected into the mains cable at 900 MHz. The audio response is the audio output from the loudspeaker measured with a microphone.

Table A.3 – Relative immunity levels ^a

Modulation method ^b		Sine wave 80 % AM at 1 kHz	"GSM-like" duty cycle 1:8 at 200 Hz	"DECT-like" duty cycle 1:24 at 100 Hz
↓ Equipment	↓ Response	dB	dB	dB
TV set ^c	Noticeable interference	0 ^d	-2	-2
	Strong interference	+4	+1	+2
	Screen off	~+19	+18	+19
Data terminal with RS232 interface ^e	Interference on the video screen	0 ^d	0	-
	Data errors	> +16	> +16	-
RS232 modem ^f	Data errors (injected on telephone interface)	0 ^d	0	0
	Data errors (injected on RS232 interface)	> +9	> +9	> +9
Regulated laboratory supply ^g	2 % error in DC output current	0 ^d	+3	+7
SDH cross connect ^h	Bit error threshold	0 ^d	0	-

^a The numbers in the table are a relative measure of the maximum RMS level (see Clause 3) of the disturbing signal (exposure) necessary to produce the same degree of interference with all modulations. A high decibel level means high immunity.

^b The disturbing signal is adjusted so that the same response (interference) is produced with all modulations.

^c The exposure is an RF current injected into the mains cable at 900 MHz. The response is the degree of interference produced on the screen. The assessment is rather subjective as the interference patterns are different for the different cases.

^d This case is chosen as the reference immunity level, i.e. 0 dB.

^e The exposure is an RF current injected into the RS232 cable at 900 MHz.

^f The exposure is an RF current injected into either the telephone or the RS232 cable at 900 MHz.

^g The exposure is an RF current at 900 MHz injected into the d.c. output cable.

^h SDH = synchronous digital hierarchy. The exposure is an incident electromagnetic field at 935 MHz.

The following items of digital equipment were tested using both sine wave AM and pulse modulation (duty cycle 1:2) at field strengths of up to 30 V/m:

- hand dryer with microprocessor control;
- 2 Mb modem with 75 Ω coaxial cable;
- 2 Mb modem with 120 Ω twisted pair cable;
- industrial controller with microprocessor, video display and RS485 interface;
- train display system with microprocessor;
- credit card terminal with modem output;
- digital multiplexer 2/34 Mb;
- Ethernet repeater (10 Mb/s).

All failures were associated with the analogue functions of the devices.

A.3 Secondary modulation effects

When trying to simulate exactly the modulation used in a digital radio telephone system, it is important not only to simulate the primary modulation but also to consider the impact of any secondary modulation which may be present.

For example, with GSM and DCS 1800, there are multi-frame effects caused by the suppression of a burst every 120 ms (thereby creating a frequency component at approximately 8 Hz). There may also be additional modulation at 2 Hz from the optional discontinuous transmission (DTX) mode.

A.4 Conclusion

It can be seen from the cases studied that the items tested responded to the disturbances independently of the modulation method used. When comparing the effects of different modulations, it is important to ensure that the same maximum RMS level of interfering signal is used.

Where significant differences existed between the effects of different modulation types, sine wave AM was always the most severe.

Where different responses are observed for sine wave modulation and TDMA, the product specific difference may be corrected by appropriate adjustment of the compliance criteria in the product standard.

In summary, sine wave modulation has the following advantages:

- narrow band detection response in analogue systems reducing background noise problems;
- universal applicability, i.e. no attempt to simulate the behaviour of the disturbing source;
- same modulation at all frequencies;
- always at least as severe as pulse modulation.

For the reasons stated above, the modulation method defined in this standard is 80 % AM sine wave. It is recommended that product committees change the modulation method only if there are specific reasons requiring a different type of modulation.

Annex B
(informative)

Field generating antennas

B.1 Biconical antenna

This antenna consists of a coaxial balun and three-dimensional element which provide a broad frequency range and can be used both for transmitting and receiving. The antenna factor curve is a substantially smooth line, typically increasing with frequency.

The compact size of these antenna makes them ideal for use in restricted areas such as anechoic chambers as proximity effects are minimized.

B.2 Log-periodic antenna

A log-periodic antenna is an array of dipoles of different lengths connected to a transmission line.

These broadband antennas have a relatively high gain and low VSWR.

When choosing an antenna for the generation of fields, it should be established that the balun can handle the necessary power.

B.3 Horn antenna and double ridge wave guide antenna

Horn antennas and double ridge wave guide antennas produce linearly polarised electromagnetic fields. They are typically used at frequencies above 1 000 MHz.

Annex C
(informative)

Use of anechoic chambers

C.1 General anechoic chamber information

A semi-anechoic chamber is a shielded enclosure having radio absorbing material on the walls and ceiling. Anechoic chambers also have such lining on the floor.

The purpose of this lining is to absorb the RF energy, preventing reflections back into the chamber. Such reflections, by interfering in a complex way with the directly radiated field, can produce maxima and minima in the intensity of the generated field.

The reflection loss of the absorbing material generally depends on the frequency of the incident wave and its angle to the normal. The loss (absorption) is typically greatest at normal incidence and decreases as the angle of incidence increases.

In order to break up reflections and enhance absorption, the absorbing material is often shaped into wedges or cones.

For semi-anechoic chambers, modification by the addition of extra RF absorbing material on the floor helps to achieve the required field uniformity at all frequencies. Experimentation will reveal the materials and positions for such additions.

The additional absorbing material should not be placed in the direct illumination path from the antenna to the EUT, but should be positioned in the identical location and orientation for testing as used during the calibration procedure.

Uniformity can also be improved by placing the field generating antenna off the axis of the chamber, such that any reflections are not symmetrical.

Anechoic chambers are less effective at low frequencies (below 30 MHz), whereas ferrite-lined chambers may also be less effective at frequencies above 1 GHz. Care shall be taken to ensure the uniformity of the generated field at the lowest and highest frequencies, and it may be necessary to rework the chamber.

**C.2 Suggested adjustments to adapt for use at frequencies above 1 GHz
ferrite-lined chambers designed for use at frequencies up to 1 GHz**

Most of the existing small anechoic chambers which use ferrite as an absorber are designed for use at frequencies up to 1 GHz. At frequencies above 1 GHz, it may be difficult or impossible for such chambers to satisfy the field uniformity requirement of 6.2 of this standard.

This paragraph presents information on the procedures to adapt such chambers for testing at frequencies above 1 GHz using the method described in Annex H.

C.2.1 Problems caused by the use of ferrite-lined chambers for radiated field immunity tests at frequencies above 1 GHz

The problem described below may occur, for example, in a small ferrite-lined anechoic chamber, or in a small (typically 7 m (*l*) × 3 m (*w*) × 3 m (*h*)) anechoic chamber lined with a combination of ferrite and carbon-loaded absorbers.

At frequencies above 1 GHz, the ferrite tiles usually behave as reflectors rather than as absorbers. It is very difficult to establish a uniform field over a 1,5 m × 1,5 m area at these frequencies owing to multiple reflections from the inner surfaces of the chamber (see Figure C.1).

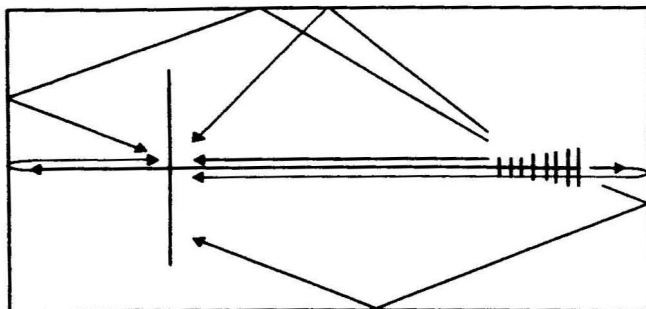


Figure C.1 – Multiple reflections in an existing small anechoic chamber

At the frequencies of the radio telephone bands, the wavelength is shorter than 0,2 m. This means that test results are very sensitive to the positioning of the field-generating antenna and the field sensor or EUT.

C.2.2 Possible solution

In order to solve existing problems, the following procedures are suggested.

- Use a horn antenna or a double-ridge wave guide antenna to reduce the field radiated backwards. This also decreases reflections from the side walls of the chamber because of the narrow beam width of the antenna.
- Shorten the distance between the transmitting antenna and EUT to minimize reflections from the side walls (the distance between the antenna and EUT can be reduced to 1 m). Use the method of 0,5 m × 0,5 m independent windows (Annex H) to ensure that the EUT is exposed to a uniform field.
- Attach medium-loaded carbon type anechoic material to the rear wall facing the EUT to eliminate direct reflection. This reduces the sensitivity of the test to the positioning of the EUT and antenna. It also may improve field uniformity at frequencies below 1 GHz.

NOTE If a highly-loaded carbon type anechoic material is used, it may be difficult to satisfy the requirement for field uniformity at frequencies below 1 GHz.

Following the above procedures will eliminate most of the reflected waves (see Figure C.2).

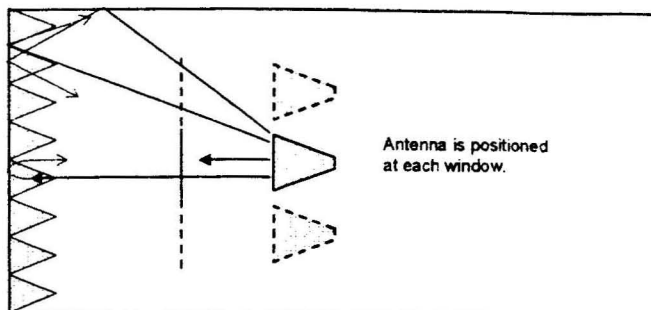


Figure C.2 – Most of the reflected waves are eliminated

Annex D
(informative)

**Amplifier non-linearity and example for the calibration procedure
according to 6.2**

D.1 Objective of limiting amplifier distortion

The goal is to keep amplifier non-linearity at a level low enough such that it does not dominate the uncertainty of the value of the field strength. Consequently, a guideline is given to assist test laboratories in understanding and limiting amplifier saturation effects.

D.2 Possible problems caused by harmonics and saturation

Overloading the amplifier may result in the following scenarios.

- a) The harmonics may contribute significantly to the field.
 - 1) If this occurs during calibration, the field strength at the intended frequency is incorrectly measured, as the broadband field probe will measure the fundamental and its harmonics. For example, assume that the third harmonic is 15 dB below the fundamental frequency at the antenna terminal and all other harmonics can be ignored. Further assume that the effective antenna factor is 5 dB lower at the frequency of the third harmonic than at the fundamental frequency. The field strength of the fundamental frequency will be only 10 dB larger than the field strength of the third harmonic. If a total field strength of 10 V/m is measured, the fundamental frequency will contribute 9,5 V/m. This is an acceptable error, as it is smaller than the field probe amplitude uncertainty.
 - 2) If harmonics are significantly present during a test, they may cause an EUT failure although the EUT is robust at the intended fundamental frequency but not robust at the harmonic frequency.
- b) Harmonics may also affect the test result, even if they are very well suppressed in special situations. For example, if a 900 MHz receiver is tested, even very weak harmonics of a 300 MHz signal may overload the receiver input. A similar scenario may also occur if the signal generator outputs non-harmonically-related signals.
- c) Saturation may be present without measurable harmonics. This occurs if the amplifier has a low pass output filter which suppresses the harmonics. This situation may also lead to incorrect results.
 - 1) If this occurs during calibration, wrong calibration data will be derived as the assumption of linearity is used in the algorithm described in 6.2.
 - 2) During a test, this type of saturation will lead to an incorrect modulation index and harmonics of the modulation frequency (usually 1 000 Hz).

From the examples given above, it is clear that a numerical limit for amplifier distortion can not be given, as the effect of distortion depends heavily on the type of EUT tested.

D.3 Options for controlling amplifier non-linearity

D.3.1 Limiting the harmonic content in the field

The harmonic content of the field can be limited with the use of an adjustable/tracking/tunable low-pass filter at the output of the amplifier.

For all frequencies where harmonics are produced at the output of the amplifier, the rejection of these harmonics in the field by more than 6 dB below the fundamental is adequate, with exception of the scenario discussed in D.2 b).

This would limit the field strength error to 10 %. For example, a 10 V/m signal measured broadband would be caused by 9 V/m from the fundamental and 4,5 V/m from the harmonics. This is a situation which is acceptable for calibration uncertainty.

For amplifiers containing a fixed low-pass filter in their output, the upper fundamental frequency concerned is about 1/3 of the maximum specified frequency of the amplifier.

D.3.2 Measuring the harmonic content of the field

The harmonic content of the field can be either be measured directly using a selective field probe or indirectly by

- determining first the effective antenna factor (the ratio between input power and field strength for a given chamber and antenna position) and then the ratio between the forward powers at the fundamental frequency and the harmonics or
- with a coupler by taking account of the antenna factor at the harmonics as provided by the antenna manufacturer.

For situations in which a low pass filter suppresses harmonics of a saturated amplifier it is suggested under no circumstances (for example worst frequency, maximum field strength with modulation) to exceed the 2 dB compression point of the amplifier. At the 2 dB compression point, the peak amplitude (in voltage) would be reduced by 20 %. This would cause a reduction of the 80 % modulation index down to 64 %, in other words, a 20 % reduction of a voltage rectified within the EUT.

D.4 Examples showing the equivalence of the two calibration methods

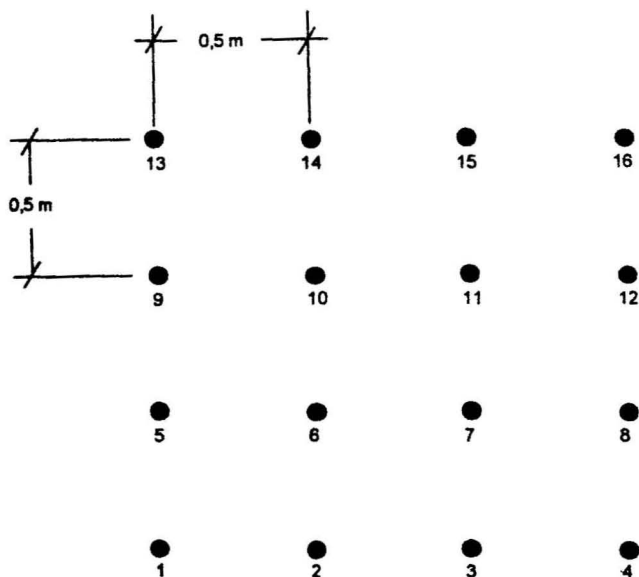


Figure D.1 – Measuring positions of the uniform field area

Figure D.1 shows the 16 positions where the field uniformity has to be measured. The distance between each of the 16 points has been fixed at 0,5 m.

D.4.1 Example for the calibration procedure using the constant field strength calibration method as described in 6.2.1

To create a constant field strength of $E_c = 6 \text{ V/m}$ (as an example) the following forward power values shown in Table D.1 have been measured at one particular frequency using the measuring setup according to Figure 7.

Table D.1 – Forward power values measured according to the constant field strength calibration method

Position	Forward power dBm
1	27
2	22
3	37
4	33
5	31
6	29
7	23
8	27
9	28
10	30
11	30
12	31
13	40
14	30
15	31
16	31

Table D.2 – Forward power values sorted according to rising value and evaluation of the measuring result

Position	Forward power dBm
2	22
7	23
1	27
8	27
9	28
6	29
10	30
11	30
14	30
5	31
12	31
15	31
16	31
4	33
3	37
13	40

NOTE
Position 13 : $40 - 6 = 34$, only 2 positions comply
Position 3 : $37 - 6 = 31$, only 6 positions comply
Position 4 : $33 - 6 = 27$, 12 positions comply

In this example the measuring points 2, 3, 7 and 13 lie outside the $\begin{smallmatrix} -0 \\ +6 \end{smallmatrix}$ dB criterion but at least (in this example) 12 out of 16 points are within the criterion. Thus, at this particular frequency, the criterion is fulfilled. In this case, the forward power to be applied is 33 dBm. This ensures that for the 12 points the field strength E_c is at least 6 V/m (position 4) and at most 12 V/m (positions 1 and 8).

D.4.2 Example for the calibration procedure using the constant power calibration method as described in 6.2.2

Point No. 1 has been chosen as a first calibration point, where a target field strength E_c of 6 V/m has been produced. At the same forward power, the following field strengths shown in Table D.3 have been recorded at one particular frequency using the measuring setup according to Figure 7.

Table D.3 – Forward power and field strength values measured according to the constant power calibration method

Position	Forward power dBm	Field strength V/m	Field strength dB relative to position 1
1	27	6,0	0
2	27	10,7	5
3	27	1,9	-10
4	27	3,0	-6
5	27	3,8	-4
6	27	4,8	-2
7	27	9,5	4
8	27	6,0	0
9	27	5,3	-1
10	27	4,2	-1
11	27	4,2	-3
12	27	3,8	-4
13	27	1,3	-13
14	27	4,2	-3
15	27	3,8	-4
16	27	3,8	-4

Table D.4 – Field strength values sorted according to rising value and evaluation of the measuring result

Position	Forward power dBm	Field strength V/m	Field strength dB relative to position 1
13	27	1,3	-13
3	27	1,9	-10
4	27	3,0	-6
5	27	3,8	-4
12	27	3,8	-4
15	27	3,8	-4
16	27	3,8	-4
10	27	4,2	-3
11	27	4,2	-3
14	27	4,2	-3
6	27	4,8	-2
9	27	5,3	-1
1	27	6,0	0
8	27	6,0	0
7	27	9,5	4
2	27	10,7	5

NOTE
Position 13 : $-13 + 6 = -7$, only 2 positions comply.
Position 3 : $-10 + 6 = -4$, only 6 positions comply.
Position 4 : $-6 + 6 = 0$, 12 positions comply.

In this example the measuring points 13, 3, 7 and 2 lie outside the -0 dB criterion but at least $+6$

(in this example exactly) 12 out of 16 points are within the criterion. Thus at this particular frequency the criterion is fulfilled. In this case the forward power to be applied for the field strength $E_c = 6$ V/m is $27 \text{ dBm} + 20 \log (6 \text{ V/m} / 3 \text{ V/m}) = 33 \text{ dBm}$. This ensures that for the 12 points the field strength E_c is at least 6 V/m (position 4) but in maximum 12 V/m (positions 1 and 8).

Annex E
(informative)

Guidance for product committees on the selection of test levels

E.1 Introduction

The transmitted power of radio transmitters is often specified in terms of ERP (effective radiated power) referred to a half-wave dipole. Therefore, the generated field strength, for the far field, can be directly obtained by the following dipole formula:

$$E = k \sqrt{P} / d \quad \text{(Equation E.1)}$$

where

E is the field strength (RMS value) (V/m);

k is a constant, with a value of 7, for free-space propagation in the far field;

P is the power (ERP) (W);

d is the distance from the antenna (m).

Nearby reflecting and absorbing objects alter the field strength.

If the ERP of the transmitter is not known, the power provided to the antenna may be used in Equation E.1 instead. In this case, a value of $k = 3$ is typically applicable for mobile radio transmitters.

E.2 Test levels related to general purposes

The test levels and the frequency bands are selected in accordance with the electromagnetic radiation environment to which the EUT can be exposed when finally installed. The consequences of failure should be borne in mind in selecting the test level to be applied. A higher level should be considered if the consequences of failure are significant.

If the EUT is to be installed at only a few sites, then an inspection of local RF sources will enable a calculation of field strengths likely to be encountered. If the powers of the sources are not known, it may be possible to measure the actual field strengths at the location(s) concerned.

For equipment intended for operation in a variety of locations, the following guidance may be used in selecting the test level to be applied.

The following classes are related to the levels listed in Clause 5; they are considered as general guidelines for the selection of the corresponding levels.

- *Class 1:* Low-level electromagnetic radiation environment. Levels typical of local radio/television stations located at more than 1 km, and transmitters/receivers of low power.

IS 14700 (Part 4/Sec 3) : 2008
IEC 61000-4-3 : 2006

- *Class 2:* Moderate electromagnetic radiation environment. Low power portable transceivers (typically less than 1 W rating) are in use, but with restrictions on use in close proximity to the equipment. A typical commercial environment.
- *Class 3:* Severe electromagnetic radiation environment. Portable transceivers (2 W rating or more) are in use relatively close to the equipment but not less than 1 m. High power broadcast transmitters are in close proximity to the equipment and ISM equipment may be located close by. A typical industrial environment.
- *Class 4:* Portable transceivers are in use within less than 1 m of the equipment. Other sources of significant interference may be within 1 m of the equipment.
- *Class x:* x is an open level which might be negotiated and specified in the product standard or equipment specification.

E.3 Test levels related to the protection against RF emissions from digital radio telephones

The test levels should be selected in accordance with the expected electromagnetic field, i.e. considering the power of the radio telephone equipment and the likely distance between its transmitting antenna and the equipment to be tested. Usually, mobile stations will give rise to more severe requirements than base stations (because mobiles tend to be located much closer to potentially susceptible devices than base stations).

The cost for establishing the required immunity and the consequences of failure should be borne in mind when selecting the test level to be applied. A higher level should only be considered if the consequences of failure are large.

Higher exposures than the selected test level may occur in practice with a lower rate of occurrence. In order to prevent unacceptable failures in those situations, it may be necessary to perform a second test at a higher level and accept a reduced performance (i.e. defined degradation accepted).

Table E.1 gives examples of test levels, performance criteria and the associated protection distances. The protection distance is the minimum acceptable distance to a digital radio telephone, when testing has been performed at the stated test level. These distances are calculated from Equation E.1, using $k = 7$ and assuming testing is carried out with an 80 % sinusoidal AM.

Table E.1 – Examples of test levels, associated protection distances and suggested performance criteria

Test level	Carrier field strength V/m	Maximum RMS field strength V/m	Protection distance for			Performance criteria ^a	
			2W GSM m	8W GSM m	¼W DECT m	Example 1 ^b	Example 2 ^c
1	1	1,8	5,5	11	1,9	–	–
2	3	5,4	1,8	3,7	0,6	a	–
3	10	18	0,6	1,1	~ 0,2 ^d	b	a
4	30	54	~ 0,2 ^d	0,4	~ 0,1 ^d	–	b
^a According to Clause 9. ^b Equipment for which the consequences of failure are not severe. ^c Equipment for which the consequences of failure are severe. ^d At these and closer distances, the far field Equation E.1 is not accurate.							

The following issues were considered when formulating the above table:

- for GSM, most terminals on the market today are of class 4 (maximum ERP 2 W). A substantial number of mobile terminals in operation are classes 3 and 2 (maximum ERP 5 W and 8 W, respectively). The ERP of GSM terminals is often lower than maximum except in areas of poor reception;
- the coverage indoors is worse than outdoors, which implies that the ERP indoors may more often than not adjust to the maximum of the class. This is the worst case situation from an EMC point of view since most of the victim equipment is also concentrated indoors;
- as described in Annex A, the immunity level of an item of equipment is well correlated with the maximum RMS value of the modulated field. For that reason, the maximum RMS field strength has been inserted into Equation E.1 instead of the carrier field strength to calculate the protection distance;
- the estimated minimum distance for safe operation, also called protection distance, has been calculated with $k = 7$ in Equation E.1 and does not take into account the statistical fluctuations of the field strength, due to reflections from walls, floor and ceiling, which are on the order of ± 6 dB;
- the protection distance according to Equation E.1 depends on the effective radiated power of the digital radio telephone and not on its operating frequency.

E.4 Special measures for fixed transmitters

The levels derived from the information in this Annex are typical values which are rarely exceeded in the described locations. At some locations these values will be exceeded e.g. radar installations, the proximity of high-power transmitters or ISM equipment located in the same building. In such cases, it may be preferable to shield the room or building and filter the signal and power wires to the equipment, rather than specify all equipment to be immune to such levels.

Annex F
(informative)

Selection of test methods

This standard and IEC 61000-4-6 define two methods for testing the immunity of electrical and electronic equipment against radiated electromagnetic energy.

In general, tests with conducted signals are more useful at lower frequencies, and tests with radiated signals more useful at higher frequencies.

There is a range of frequencies for which the test methods which appear in either standard are useable. It is possible to use the test method defined in IEC 61000-4-6 up to 230 MHz. It is also possible to use the test method defined in this part down to 26 MHz. The purpose of this annex is to provide a guide to product committees and product specification writers in the selection of the most appropriate test method to ensure repeatability, based on the design and type of EUT.

Consideration should be given to:

- the wavelength of the radiated field compared to the mechanical dimensions of the EUT;
- the relative dimensions of the cabinets and wires of the EUT;
- the number of wires and enclosures which constitute the EUT.

Annex G
(informative)

Description of the environment

G.1 Digital radio telephones

Tables G.1, G.2 and G.3 list radio system parameters relevant to EMC.

The abbreviations and definitions listed hereafter are used in the aforementioned tables.

- **CDMA (Code Division Multiple Access)**: multiplexing where the transmitter encodes the signal using a pseudo-random sequence which the receiver also knows and can use to decode the received signal. Each different random sequence corresponds to a different communication channel;
- **CT-2 (Cordless Telephone, second generation)**: cordless telephone system, widely used in some European countries;
- **DCS 1800 (Digital Cellular System)**: cellular mobile telecommunication system, low cost, worldwide use;
- **DECT (Digital Enhanced Cordless Telecommunications)**: cordless cellular telecommunication system, low cost, widely used in Europe;
- **DTX (Discontinuous Transmission)**: significantly reduced burst repetition frequency, used for power saving, when no information needs to be transmitted;
- **ERP (Effective Radiated Power)**: effective radiated power referred to a half-wave dipole;
- **FDD (Frequency Division Duplex)**: multiplexing in which different frequencies are allocated to the transmit and receive channels;
- **FDMA (Frequency Division Multiple Access)**: multiplexing in which separate frequency bands are allocated to each channel;
- **GSM (Global System for Mobile Communications)**: cellular mobile telecommunication system, worldwide use;
- **HIPERLAN**: High performance radio local area network;
- **IMT-2000 (International Mobile Telecommunication 2000)**: 3rd generation cellular phone technology which according to the size and speed of transmissions, allow users to receive high quality colour video images;
- **NADC (North American Digital Cellular)**: digital cellular mobile communication system, widely used in North America. A popular term used to describe digital cellular systems that comply with Telecommunications Industry Association Interim Standard – 54, also known as D-AMPS;
- **PDC (Personal Digital Cellular System)**: cellular mobile telecommunication system, widely used in Japan;
- **PHS (Personal Handy Phone System)**: cordless telephone system, widely used in Japan;
- **RFID (Radio Frequency Identification)**: RFID systems include automatic article identification, asset tracking, alarm systems, personnel identification, access control, proximity sensors;

IS 14700 (Part 4/Sec 3) : 2008
IEC 61000-4-3 : 2006

- **RTTT (Road Traffic & Transport Telematics)**: includes road toll systems.
- **TDMA (Time Division Multiple Access)**: see Clause 4;
- **TDD (Time Division Duplex)**: multiplexing in which different time slots are allocated to the transmit and receive channels.

Table G.1 – Mobile and portable units

Parameters	System name								
	GSM	DCS 1800	DECT	CT-2	PDC	PHS	NADC	IMT-2000 TDD	IMT-2000 FDD
Transmitter frequency range	890 MHz to 915 MHz	1,71 GHz to 1,784 GHz	1,88 GHz to 1,96 GHz	864 MHz to 868 MHz	940 MHz to 956 MHz and 1,429 GHz to 1,453 GHz	1,895 GHz to 1,918 GHz	825 MHz to 845 MHz	1 900 MHz to 1 920 MHz	1 920 MHz to 1 980 MHz
Access Technique	TDMA	TDMA	TDMA/ TDD	FDMA/ TDD	TDMA	TDMA/ TDD	TDMA	CDMA/ TDMA TDD	CDMA/ FDMA FDD
Burst repetition frequency	217 Hz	217 Hz	100 Hz	500 Hz	50 Hz	200 Hz	50 Hz	NA	NA
Duty cycle	1:8	1:8	1:24 (also 1:48 and 1:12)	1:12	1:3	1:8	1:3	Continuous	Continuous
Maximum ERP	0,8 W; 2 W; 5 W; 8 W; 20 W	0,25 W; 1 W; 4 W	0,25 W	<10 mW	0,8 W; 2 W	10 mW	<6 W	0,25 W	0,25 W
Secondary modulation	2 Hz (DTX) and 0,16 Hz to 8,3 Hz (multi-frame)	2 Hz (DTX) and 0,16 Hz to 8,3 Hz (multi-frame)	None	None	None	None	None	None	None
Geographical area	Worldwide	Worldwide	Europe	Europe	Japan	Japan	USA	Europe	Europe
NOTE CT-3 is considered to be covered by DECT.									

Table G.2 – Base stations

Parameters	System name								
	GSM	DCS 1800	DECT	CT-2	PDC	PHS	NADC	IMT-2000 TDD	IMT-2000 FDD
Transmitter frequency range	935 MHz to 960 MHz	1,805 GHz to 1,88 GHz	1,88 GHz to 1,96 GHz	864 MHz to 868 MHz	810 MHz to 826 MHz and 1,477 GHz to 1,501 GHz	1,895 GHz to 1,918 GHz	870 MHz to 890 MHz	1 900 MHz to 1 920 MHz	2 110 MHz to 2 170 MHz
Access Technique	TDMA	TDMA	TDMA/TDD	FDMA/TDD	TDMA	TDMA/TDD	TDMA	CDMA/TDMA/TDD	CDMA/FDMA/FDD
Burst repetition frequency	217 Hz	217 Hz	100 Hz	500 Hz	50 Hz	200 Hz	50 Hz	NA	NA
Duty cycle	1:8 to 8:8	1:8 to 8:8	1:2	1:2	1:3 to 3:3	1:8	1:3 to 3:3	Continuous	Continuous
Maximum ERP	2,5 W to 320 W	2,5 W to 200 W	0,25 W	0,25 W	1 W to 96 W	10 mW to 500 mW	500 W	20 W	20 W
Secondary modulation	2 Hz (DTX) and 0,16 Hz to 8,3 Hz (multi-frame)	2 Hz (DTX) and 0,16 Hz to 8,3 Hz (multi-frame)	None	None	None	None	None	None	None
Geographical area	Worldwide	Worldwide	Europe	Europe	Japan	Japan	USA	Europe	Europe
NOTE CT-3 is considered to be covered by DECT.									

Table G.3 – Other RF devices

Parameters	System name					
	RFID	RTTT	Wideband data transmission systems and HIPERLANs	Wideband data transmission systems and HIPERLANs	Wideband data transmission systems and HIPERLANs	Non specific short range devices
Transmitter frequency in MHz	2 446 – 2 454	5 795 – 5 815	2 400 – 2 483,5	5 150 – 5 350	5 470 – 5 725	2 400 – 2 483,5 5 725 – 5 875
Modulation type	FHSS if more than 500 mW	None	FHSS	None	None	None
Maximum ERP	a) 500 mW b) 4 W	2 W or 8 W	100 mW and spectrum power density limitation	200 mW mean	1 W mean	10 mW 25 mW
Duty cycle	a) up to 100 % b) <15 % within 200 ms period	No restrictions	No restrictions	No restrictions	No restrictions	No restrictions
Channel spacing	None	5 MHz or 10 MHz within some frequency ranges	None	None	None	None
Geographical area	Worldwide	Worldwide	Worldwide	Worldwide	Worldwide	Worldwide

Annex H
(normative)

Alternative illumination method for frequencies above 1 GHz
("independent windows method")

H.1 Introduction

When testing at frequencies above 1 GHz, the test distance shall be 1 m when using the independent windows method (for example, the radio-telephone bands). Compliance with the field uniformity requirement shall be verified for the selected test distance.

NOTE 1 With a test distance of 3 m, using an antenna with a narrow beam width or a ferrite-lined chamber at frequencies above 1 GHz, it may be difficult to satisfy the field uniformity requirement over the 1,5 m × 1,5 m calibration area.

The alternative method for frequencies above 1 GHz divides the calibration area into a suitable array of 0,5 m × 0,5 m windows such that the whole area to be occupied by the face of the EUT is covered (see Figures H.1a and H.1b). The field uniformity shall be independently calibrated over each window (see Figure H.2), using the procedure given below. The field generating antenna shall be placed 1 m from the calibration area.

NOTE 2 Cable length and geometry are less critical at these high frequencies; therefore, the face area of the EUT is the determining factor for the size of the calibration area.

H.2 Calibration of field

The following steps shall be performed on each window:

- position the field sensor at one of the four corners of the window;
- apply a forward power to the field generating antenna so that the field strength obtained is in the range 3 V/m to 10 V/m, through the frequency range in steps of 1 % of the starting frequency (and thereafter the preceding frequency) and record both (power and field strength) readings;
- with the same forward power, measure and record the field strength at the remaining three corners; all four field strengths shall lie within a range of 0 dB to 6 dB;
- take the location with the lowest field strength as reference (this ensures that the -0 dB requirement is met);
- forward power and the field strength being known, the necessary forward power for the required test field strength can be calculated (for example if, at a given point, 80 W gives 9 V/m, then 8,9 W is needed for 3 V/m). The calculation shall be recorded;
- repeat steps a) to e) for both horizontal and vertical polarizations.

The antennas and cables used for this uniform field calibration shall be used for testing. Therefore, the cable losses and the antenna factors of the field-generating antennas do not have to be taken into consideration.

The position of the generating antennas and cables shall be recorded as precisely as possible. Since even small displacements will significantly affect the field, the same positions shall be used for testing.

During the test, at each frequency the forward power established in step e) above shall be applied to the field-generating antenna. The test shall be repeated with the field-generating antenna repositioned to illuminate each of the required windows in turn (see Figures H.1 and H.2).

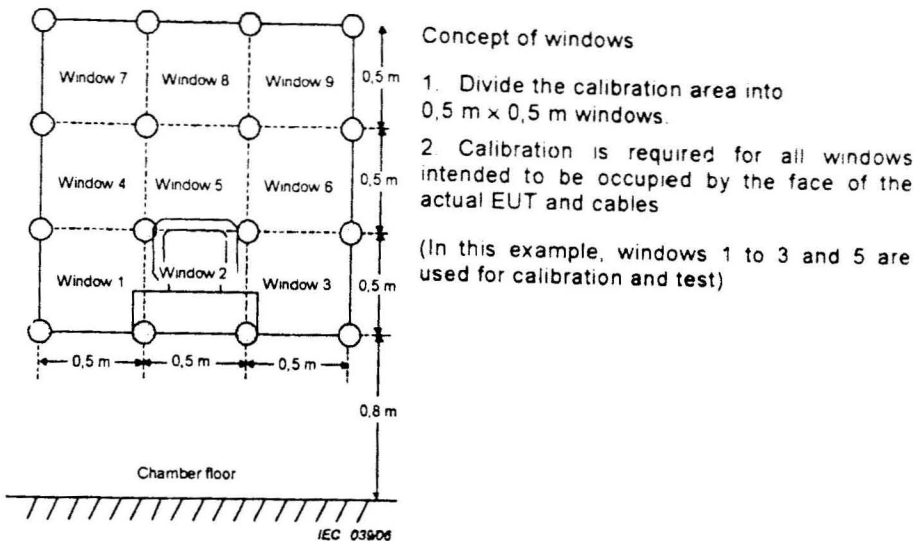


Figure H.1a – Example of division for table-top equipment

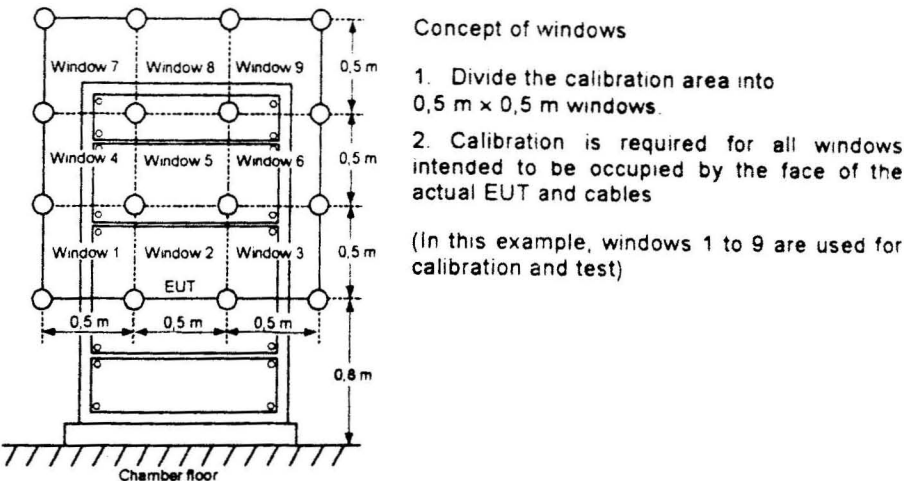


Figure H.1b – Example of division for floor-standing equipment

Figure H.1 – Examples of division of the calibration area into 0,5 m x 0,5 m windows

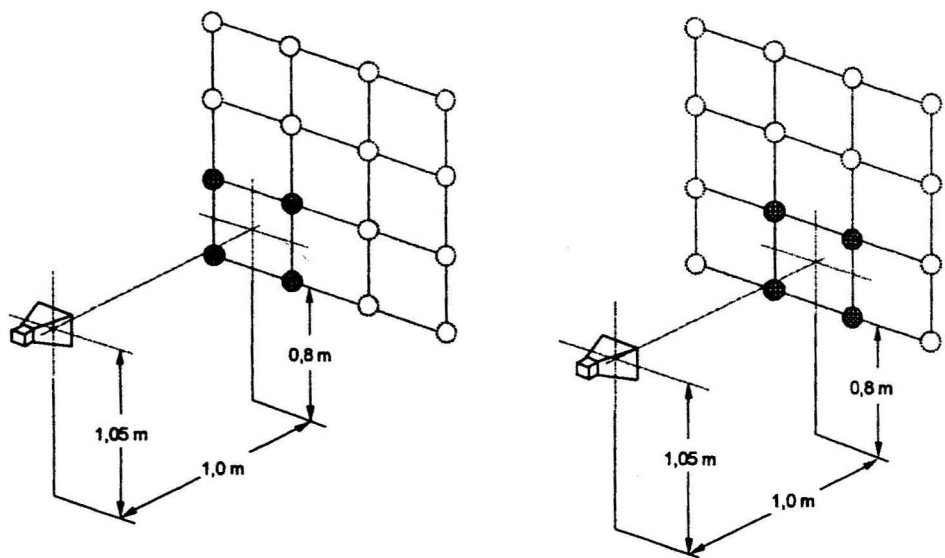


Figure H.2 – Example of illumination of successive windows

Bureau of Indian Standards

BIS is a statutory institution established under the *Bureau of Indian Standards Act, 1986* to promote harmonious development of the activities of standardization, marking and quality certification of goods and attending to connected matters in the country.

Copyright

BIS has the copyright of all its publications. No part of these publications may be reproduced in any form without the prior permission in writing of BIS. This does not preclude the free use, in course of implementing the standard, of necessary details, such as symbols and sizes, type or grade designations. Enquiries relating to copyright be addressed to the Director (Publications), BIS.

Review of Indian Standards

Amendments are issued to standards as the need arises on the basis of comments. Standards are also reviewed periodically; a standard along with amendments is reaffirmed when such review indicates that no changes are needed; if the review indicates that changes are needed, it is taken up for revision. Users of Indian Standards should ascertain that they are in possession of the latest amendments or edition by referring to the latest issue of 'BIS Catalogue' and 'Standards: Monthly Additions'.

This Indian Standard has been developed from Doc: No. LITD 09 (3016).

Amendments Issued Since Publication

Amendment No.	Date of Issue	Text Affected

BUREAU OF INDIAN STANDARDS

Headquarters:

Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110 002

Telephones: 2323 0131, 2323 3375, 2323 9402

Website: www.bis.org.in

Regional Offices:

Central : Manak Bhavan, 9 Bahadur Shah Zafar Marg
NEW DELHI 110 002

Telephones

{ 2323 7617
{ 2323 3841

Eastern : 1/14, C.I.T. Scheme VII M, V.I.P. Road, Kankurgachi
KOLKATA 700 054

{ 2337 8499, 2337 8561
{ 2337 8626, 2337 9120

Northern : SCO 335-336, Sector 34-A, CHANDIGARH 160 022

{ 260 3843
{ 260 9285

Southern : C.I.T. Campus, IV Cross Road, CHENNAI 600 113

{ 2254 1216, 2254 1442
{ 2254 2519, 2254 2315

Western : Manakalaya, E9 MIDC, Marol, Andheri (East)
MUMBAI 400 093

{ 2832 9295, 2832 7858
{ 2832 7891, 2832 7892

Branches: AHMEDABAD. BANGALORE. BHOPAL. BHUBANESHWAR. COIMBATORE. FARIDABAD. GHAZIABAD. GUWAHATI. HYDERABAD. JAIPUR. KANPUR. LUCKNOW. NAGPUR. PARWANOO. PATNA. PUNE. RAJKOT. THIRUVANANTHAPURAM. VISAKHAPATNAM.